



H380 HSPA+ M.2 Module

Perfect Wireless Experience

 Quad-band
GSM/GPRS/EDGE

 Quad-band HSPA+

 5.76Mbps HSUPA


 21Mbps HSDPA

 Win 8.1/10

 Digital Audio

H380 M.2 module adopts one of the most advanced Intel platforms in the industry and supports GSM/GPRS/EDGE and UMTS/HSDPA/HSUPA/HSPA+.

H380 module adopts M.2 standard interfaces, can be applied to consumer electronics such as tablet PCs/notebook and ultra book, fully satisfying the demand of mobile broadband applications for all kinds of users.

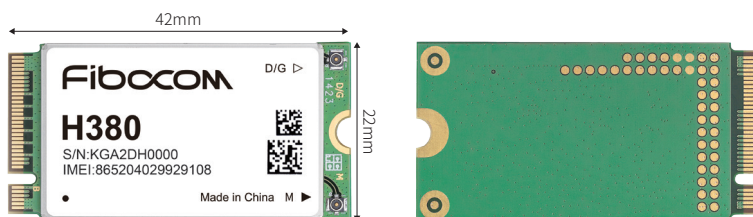

Available For

- Global Market



H380 HSPA+ M.2 Module

Perfect Wireless Experience

H380 HSPA+ Module Technical Specifications

Product Features

- WCDMA: Band 1,2,5,8
- GSM/GPRS/EDGE: 850/900/1800/1900MHz
- M.2 42.0 x 22.0 x 2.3 mm
- Operating Temperature: -30 ~ +75°C
Storage Temperature: -40 ~ +85°C
- Operating Voltage : DC 3.135V ~ 4.4V, Typical 3.3V
- TX Power
UMTS/HSPA Class 3(0.25W)
GSM :850/900 MHz Class 4(2W)
GSM :1800/1900 MHz Class 1(1W)
EDGE :850/900 MHz Class E2(0.5W)
EDGE :1800/1900 MHz Class E2(0.4W)
- AT Command Set:
3GPP TS 27.007 and 27.005,
and propriataty FIBOCOM AT commands

Data

- UMTS/HSDPA/HSUPA 3GPP release 7
HSUPA 5.76Mbps (Cat 6)
HSDPA 21Mbps (Cat 14)
- SMS: MO/MT Text and PDU modes
Cell broadcast
- GSM 3GPP release 7
EDGE (E-GPRS) Multi-slot class 33(296kbps DL,
236.8kbps UL)
GPRS Multi-slot class 33(107kbps DL, 85.6kbps UL)

Interfaces

- SIM Card: 1.8V/3.0V
- 1 x USB 2.0
- Multiple Profiles over USB
- Antenna Interfaces x2
- EINT、System Indicator
- Clock

Drivers

- Win 8.1/10
- Linux 2.6.18 above
- Win CE
- Android 4.2 above



Approvals

- CCC/RoHS/FCC/CE/GCF/PTCRB/NCC

Copyright © Fibocom Wireless Inc. | Subject to changes in technology, design and availability | E-mail : market@fibocom.com | Tel : +86 755-2673 3555